


5.2: VIGILON COMPACT FIRE DETECTION

Mimic Panels

GENT

by Honeywell

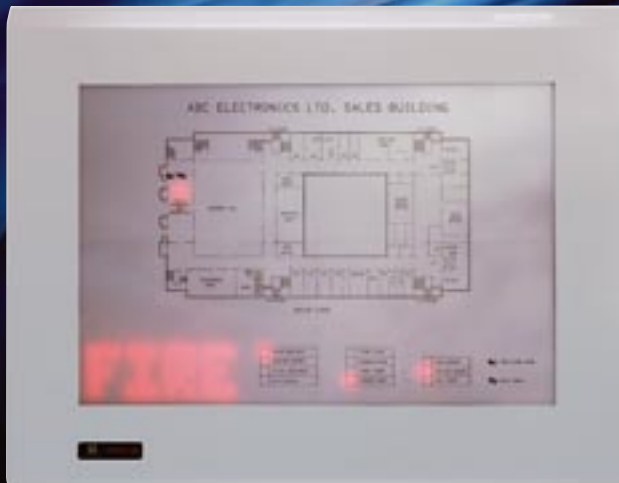

A2 Mimic

The A2 and A4 Mimic Panels provide a pictorial representation of the building's layout allowing rapid indication of fire location. The mimic panels have a selection of programmable LED's onto which a CAD drawing of the site is overlaid.


Alternatively a zonal overlay kit may be used.

Overlays are easily updated if site details alter.

TECHNICAL SPECIFICATION		
Type	A2 Mimic	A4 Mimic
Max Quantity per Loop	4	4
Batteries	12V @ 7Ah	12V @ 7Ah
Battery Standby	24 hours + 30 minutes alarm upgradeable to 72 hours	
Approx Weight	20 Kg	Display 2.3 Kg, Control panel 10.4 Kg
Operating Temperature	0°C to 45°C	
Relevant Standard	BS 5839: Part 4 + EN54: Part 2 & 4	
Cable Entry	Top conduit knockins	Rear
Load Factor	3	3

	A	B	C
A2 Mimic	650	830	90
A4 Mimic Display	276	330	73

Dimensions (mm)

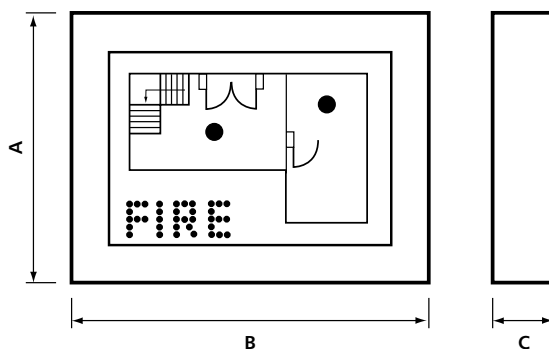

A4 Mimic Display

ORDER CODES

A4 Mimic Panel	VIG-MIM-A4
A4 Zonal Mimic	VIG-ZONE-A4
A2 Mimic Panel	VIG-MIM
A2 Zonal Mimic	VIG-ZONE