

GENT

by Honeywell


4: CONVENTIONAL FIRE DETECTION

Manual Call Points

Manual call points are manufactured from ABS with plastic covered push break glasses for safe and simple operation. No hammer is required.

For accessories see page 19.

A polycarbonate cover version is available for applications susceptible to inadvertent operation, such as sports halls.

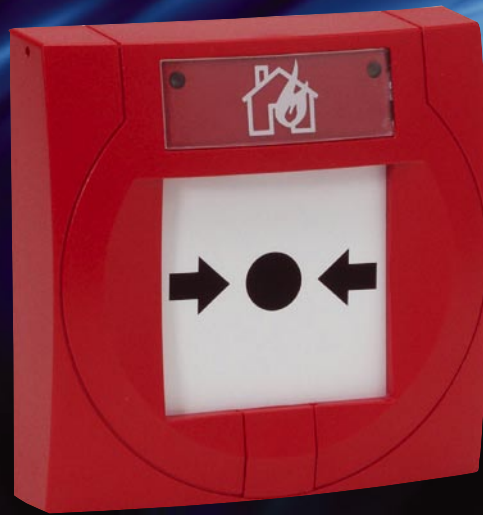

Manual Call Point

TECHNICAL SPECIFICATION

Nominal Voltage	24Vdc
Ingress Protection	IP43 (IP55 with cover)
Approx Weight	0.11 Kg
Operating Temperature	-20°C to +70°C
Relevant Standard	EN 54-11
Approvals	LPCB applied for
Alarm Current	30mA (max)
Colour	Red (Similar to RAL 3020)

4

ORDER CODES

MCP Flush 470 ohm	14222-08
NO/NC* Flush Call Point	71160-62NM
MCP Key operated (470 ohm)	14225-08
Pack of 10 MCP S/Mount Boxes	71167-94NM
Pack of 10 Spares Glasses	71167-90NM
Pack of 10 Test Keys	S4-34899
MCP Weather Resistant kit	S4-34898
Pack of 10 Resettable Elements	71167-96NM
Pack of 5 Protective Covers	71167-95NM

* Normally Open / Normally Close

Dimensions (mm)

