

GENT

by Honeywell

4: CONVENTIONAL FIRE DETECTION

Power Supplies

To supply additional standby power for control panels or relays.

Protected against over-voltage and reverse polarity connections.

Fault monitoring to comply with BS 5839.




Power Supply Unit (O5216-24)

TECHNICAL SPECIFICATION

Mains Input	230V ac	230V ac
Output Current	6A	1A
Output Voltage	27.5V dc	
Operating Temperature	-10° to +40°C	-10° to +50°C
Max. Battery Capacity	2 x 12V/24Ah	2 x 12V/7Ah
Approx Weight	8.5 Kg	7.5Kg

4

Dimensions (mm)

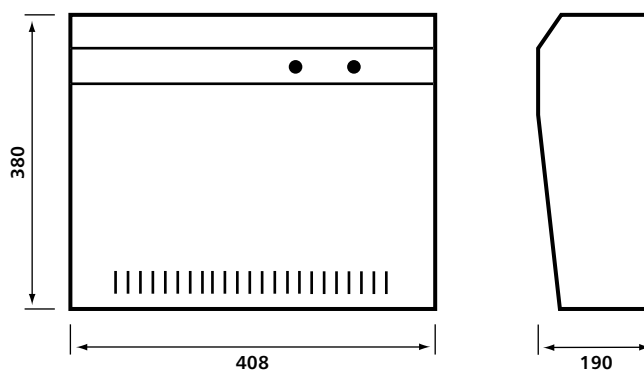

ORDER CODES

Power Supply Units (less cells)

24V, 6.0A charger	05216-24
24V, 1A Charger	621028